


JIS Sürgülü Vana / JIS Type Gate Valve

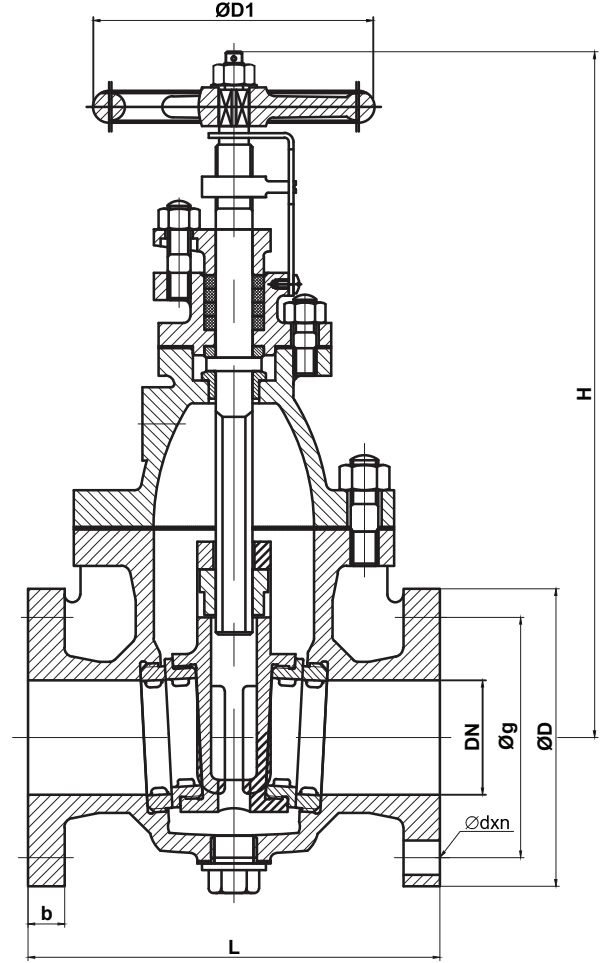

NO	PARÇA ADI	PART NAME	MATERIAL
1	GÖVDE	BODY	GG20
2	SİT	SEAT	2Cr13
3	SÜRGÜ	WEDGE	GG20
4	MİL	STEM	2Cr13
5	CONTA	GASKET	Graphite
6	KAPAK	BONNET	GG20
7	HENDİL	HANDLE	GG20

DN	JIS 5K								JIS 10K							
	L	øD	øg	ødxn	b	H	øD1	KG	L	øD	øg	ødxn	b	H	øD1	KG
50	180	130	105	4 x 15	16	285	125	13,5	200	155	120	4 x 19	20	300	140	19,5
65	190	155	130	4 x 15	18	330	140	19,0	220	175	140	4 x 19	22	350	160	27,6
80	200	180	145	4 x 19	18	380	160	24,5	230	185	150	8 x 19	22	400	180	33,0
100	230	200	165	8 x 19	20	430	180	35,5	250	210	175	8 x 19	24	450	200	46,0
125	250	235	200	8 x 19	20	495	200	48,0	270	250	210	8 x 23	24	520	224	66,0
150	270	265	230	8 x 19	22	560	224	65,5	290	280	240	8 x 23	26	580	250	86,0
200	290	320	280	8 x 23	24	680	280	103	320	330	290	12 x 23	26	700	315	136
250	330	385	345	12 x 23	26	800	355	164	380	400	355	12 x 25	30	840	400	230
300	370	430	390	12 x 23	28	920	400	236	440	445	400	16 x 25	32	960	450	331
350	410	480	435	12 x 25	30	1000	450	-	500	490	445	16 x 25	34	1050	500	-
400	470	540	495	16 x 25	30	1100	500	-	590	560	510	16 x 27	36	1150	560	-

UYGULAMA ALANLARI / APPLICATIONS

YAĞ VE DİZEL SİSTEMLERİ, 120°YE KADAR SU VE BUHAR DEVRELERİ
OIL AND FUEL OIL, WATER AND STEAM UP TO 120° SYSTEMS

BAĞLANTI ÖLÇÜLERİ JIS B2220 ÇELİK BORU STANDARTINA UYGUNDUR.
FLANGE DIMENSIONS ARE ACCORDING TO JIS B2220 STANDART OF STEEL PIPE