


Dreyn Vanası (Gönye Tip - Yaylı) Self Closing Valve (Angle Type - Spring Loaded)

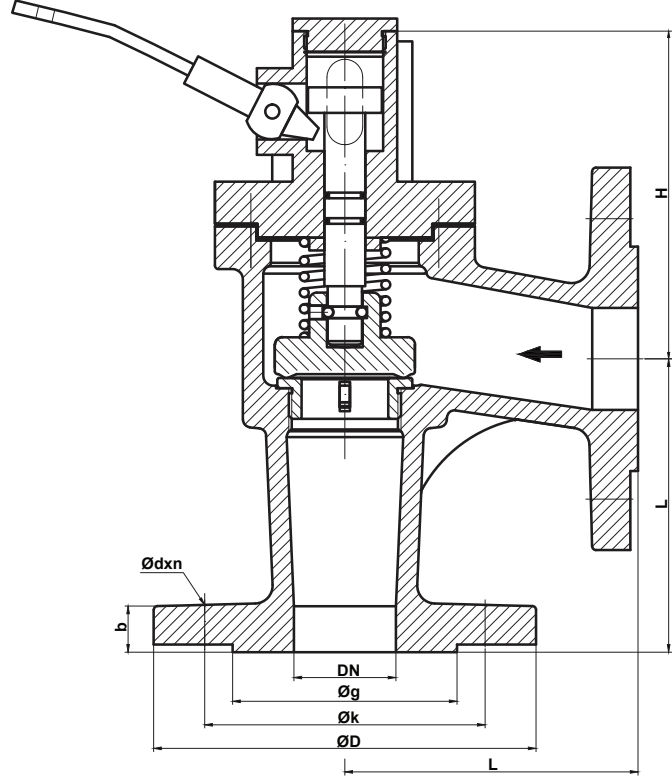

NO	PARÇA ADI	PART NAME	MATERIAL
1	GÖVDE	BODY	GGG40.3
2	SİT	SEAT	AISI 420 / BRONZE
3	KAPAK	BONNET	GGG40.3
4	MİL	STEM	X20Cr13
5	O-RİNG	O-RING	VITON
6	YAY	SPRING	SPRING STEEL C
7	KLAPE	DISC	X20Cr13 / RG5
8	BİLYA	BALLS	X20Cr5Ni8
9	SETUSKUR	SCREW	AISI 304
10	KOL	LEVER	AISI 304
11	CİVATA	SCREW	AISI 304
12	SETUSKUR CİVATA	GRUB SCREW	8.8 STEEL
13	KAPAK VİDASI	BONNET SCREW	Ms 58

DN	ØD	Øk	Øg	L	b	H	L1	STROK	Ødxn	KG
15	95	65	45	90	14	160	164	9	14x4	3,8
20	105	75	58	95	16	160	164	9	14x4	4,5
25	115	85	68	100	16	165	164	12	14x4	6,5
32	140	100	78	105	18	170	164	13	18x4	7,4
40	150	110	88	115	18	185	164	15	18x4	10,5
50	165	125	102	125	20	190	167	20	18x4	13,5
65	185	145	122	145	20	205	167	22	18x4	18
80	200	160	138	155	22	250	167	25	18x8	23
100	220	180	158	175	24	270	167	30	18x8	36
125	250	210	188	200	26	315	200	34	18x8	54
150	285	240	212	225	26	370	225	42	22x8	72

UYGULAMA ALANLARI / APPLICATIONS

YAĞ VE DİZEL SİSTEMLERDE / OIL AND FUEL SYSTEMS

TEKNİK ÖZELLİKLER / TECHNICAL PROPERTY

ÇALIŞMA ŞARTLARI / WORKING CONDITIONS: DIN 2401
BAĞLANTILAR / ENDS: DIN 1092-2
VANA BOYUTLARI / VALVE DIMENSIONS: DIN 3202 F1
ÇALIŞMA SICAKLIĞI / WORKING TEMP.: -10°C / +220°C
ÇALIŞMA BASINCI / WORKING PRESSURE: PN16
FACE TO FACE DIMENSIONS: TS EN 558-1