




Çek Vana (Düz Tip) / Lift Check Valve (Straight Type)

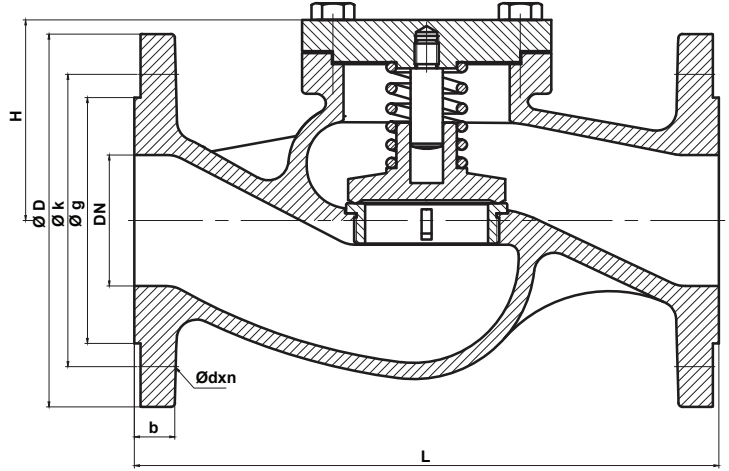

NO	PARÇA ADI	PART NAME	MATERIAL
1	GÖVDE	BODY	GG25/GGG40.3/RG5-10
2	SİT	SEAT	BRONZE / AISI 420
3	KAPAK	BONNET	ST 37
4	MİL	STEM	AISI 420 / MS58
5	YAY	SPRING	AISI 304
6	KLAPE	DISC	RG5 / AISI 420
7	CONTA	GASKET	KLINGRIT
8	CİVATA	BOLT	8.8 STEEL

DN	ØD	Øk	Øg	L	b	H	STROK	Ødxn	KG
15	95	65	45	130	14	64	7	14x4	3,5
20	105	75	58	150	16	64	7	14x4	4
25	115	85	68	160	16	67	9	14x4	5
32	140	100	78	180	18	72	10	18x4	8
40	150	110	88	200	18	84	12	18x4	9
50	165	125	102	230	20	89	18	18x4	13
65	185	145	122	290	20	100	20	18x4	18,5
80	200	160	138	310	22	106	22	18x8	20
100	220	180	158	350	24	134	27	18x8	32
125	250	210	188	400	26	151	32	18x8	47
150	285	240	212	480	26	196	42	22x8	72
200	340	295	268	600	30	246	52	22x12	110
250	405	355	320	730	32	242	65	26x12	140
300	460	410	378	850	32	282	78	26x12	230
350	520	470	438	980	36	380	100	26x16	430
400	580	525	490	1100	38	420	115	30x16	482

UYGULAMA ALANLARI / APPLICATIONS

DENİZ SUYU, TATLI SU, YAĞ VE 220°C KADAR BUHAR DEVRELERİNDE SEA WATER, FRESH WATER, OIL AND STEAM UP TO 220°C SYSTEMS

TEKNİK ÖZELLİKLER / TECHNICAL PROPERTY

ÇALIŞMA ŞARTLARI / WORKING CONDITIONS: DIN 2401

BAĞLANTILAR / ENDS: DIN 1092-2

ÇALIŞMA SICAKLIĞI / WORKING TEMP.: -10°C / 220°C

ÇALIŞMA BASINCI / WORKING PRESSURE: PN16

FACE TO FACE DIMENSIONS: TS EN 558-1

RENKLER / COLORS

PİK DÖKÜM VANALAR / CAST IRON VALVES:

MAVİ / BLUE

SFERO DÖKÜM VANALAR / DUCTILE IRON VALVES:

ZEYTİN YEŞİLİ / OLIVE GREEN

SERTİFİKALI VANALAR / CERTIFICATE VALVES:

LACİVERT / ULTRAMARINE