


## Çek Vana (Gönye Tip) / Lift Check Valve (Angle Type)

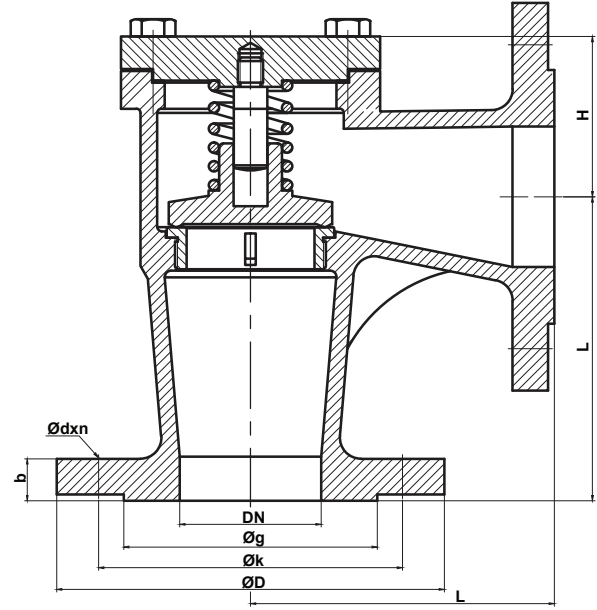

NO	PARÇA ADI	PART NAME	MATERIAL
1	GÖVDE	BODY	GG25/GGG40.3/RG5-10
2	SİT	SEAT	BRONZE / AISI 420
3	KAPAK	BONNET	ST 37
4	MİL	STEM	AISI 420 /MS58
5	YAY	SPRING	AISI 304
6	KLAPE	DISC	RG5 / AISI 420
7	CONTA	GASKET	KLINGRIT
8	CİVATA	BOLT	8.8 STEEL

DN	ØD	Øk	Øg	L	b	H	STROK	Ødxn	KG
15	95	65	45	90	14	50	9	14x4	3,5
20	105	75	58	95	16	50	9	14x4	4
25	115	85	68	100	16	54	12	14x4	5
32	140	100	78	105	18	57	13	18x4	8
40	150	110	88	115	18	69	15	18x4	9
50	165	125	102	125	20	71	20	18x4	12
65	185	145	122	145	20	77	22	18x4	16
80	200	160	138	155	22	86	25	18x8	20
100	220	180	158	175	24	110	30	18x8	31
125	250	210	188	200	26	97	34	18x8	42
150	285	240	212	225	26	129	42	22x8	54
200	340	295	268	275	30	155	55	22x12	85
250	405	355	320	325	32	166	65	26x12	140
300	460	410	370	375	32	202	78	26x12	220
350	520	470	430	425	36	252	100	26x16	306
400	580	525	482	475	38	281	115	29,5x16	466

### UYGULAMA ALANLARI / APPLICATIONS

DENİZ SUYU, TATLI SU, YAĞ VE 220°C KADAR BUHAR DEVRELERİNDE SEA WATER, FRESH WATER, OIL AND STEAM UP TO 220°C SYSTEMS

### TEKNİK ÖZELLİKLER / TECHNICAL PROPERTY

ÇALIŞMA ŞARTLARI / WORKING CONDITIONS: DIN 2401

BAĞLANTILAR / ENDS: DIN 1092-2

ÇALIŞMA SICAKLIĞI / WORKING TEMP.: -10°C / 220°C

ÇALIŞMA BASINCI / WORKING PRESSURE: PN16

FACE TO FACE DIMENSIONS: TS EN 558-1

### RENKLER / COLORS

PIK DÖKÜM VANALAR / CAST IRON VALVES:

MAVİ / BLUE

SFERO DÖKÜM VANALAR / DUCTILE IRON VALVES:

ZEYTİN YEŞİLİ / OLIVE GREEN

SERTİFİKALI VANALAR / CERTIFICATE VALVES:

LACİVERT / ULTRAMARINE BLUE